

Flytrap Commercial™

Commercial Glueboard Insect Control

Please read these instructions carefully and store in a safe place for future reference.

FLYTRAP COMMERCIAL™

As part of the P+L brand of insect control products, **Flytrap Commercial™** is an effective and versatile commercial flykiller which utilises highly effective UV tubes and is designed for use with a high specification glupac™ glueboard. Three sizes of unit are available and **Flytrap Commercial™** can be ceiling suspended, discreet or slimline wall mounted.

Contents of package

- 1 x Flytrap Commercial flykiller
- 1 x glupac™ pheromone impregnated glueboard
- 4 x Screws and wall plugs
- 2 x Suspension keyrings
- 2 x Slimline mounting wall brackets
- 2 x Discreet mounting wall brackets
- 1 x Mains cable
- 2 x High powered UV tubes (Fitted)

WARNING - THIS APPLIANCE MUST BE EARTHED

INSECT CONTROL PRODUCTS

Flytrap Commercial™ utilises high powered ultra violet tubes to attract flying insects and retains the caught insects on a pheromone impregnated glueboard for inspection or hygienic disposal.

POSITIONING

THIS UNIT IS FOR INDOOR USE ONLY.

Flytrap Commercial™ should ideally be fixed around two meters above the ground, preferably in the darkest place within the area to be protected and is supplied with a two meter mains lead. Do not position the unit close to windows, skylights or other sources of light, or where it may be obscured by furniture, doors or other obstacles. Ideally, **Flytrap Commercial™** units should be visible from every part of the area to be protected.

INSTALLATION

PRIOR TO INSTALLATION, ENSURE THE POWER SUPPLY OF YOUR MAINS OUTLET CORRESPONDS TO THAT MARKED ON THE SPECIFICATION LABEL FOUND ON THE FLYKILLER.

Flytrap Commercial™ can be mounted in three different ways as shown in the mounting options section of this document. Once installed in position, fit the glupac™ glueboard in position as described in the glueboard replacement section of this document. Use the removable mains lead and plug to connect the **Flytrap Commercial™** to an appropriate power supply.

WARNING - THIS APPLIANCE MUST BE EARTHED

USING FLYTRAP COMMERCIAL™

Flytrap Commercial™ should ideally be in operation for 24 hours a day, ensuring your premises are kept free of flying insects. Insects are most attracted to **Flytrap Commercial™** unit at night when there is no competition from daylight or other light sources.

CLEANING

ENSURE THAT THE FLYING INSECT KILLER IS DISCONNECTED FROM THE MAINS BEFORE CLEANING

It is recommended that cleaning is carried out regularly when the glueboard is replaced. Once the glueboard is removed, the unit should be thoroughly wiped down with a damp cloth, removing any build up of dirt. Ensure the unit is completely dry before reconnecting it to the power supply.

GUARANTEE

Flytrap Commercial™ has a three year guarantee and if maintained as recommended in these instructions should continue to work for many years.* Use of non-approved consumables may invalidate the guarantee. Ensure genuine glupac™ glueboards are used in conjunction with this product.

*Excludes tubes, glueboards and starters. Does not cover breakdown due to misuse, incorrect operation or use in an incorrect application.

MOUNTING FIXING CENTRES

METHOD	FTC30	FTC40	FTC80
Slimline	305mm	458mm	458mm
Discreet	305mm	458mm	458mm
Suspended	506mm	668mm	668mm

Slimline Wall

Discreet Wall

Suspended

(Chain not supplied)

Mounting Options

GLUEBOARD REPLACEMENT

BEFORE REPLACING THE GLUEBOARD, ALWAYS ENSURE THAT THE UNIT IS DISCONNECTED FROM THE MAINS SUPPLY.

The glueboard should be replaced every month with a genuine *glupac™* glueboard. Use of non-approved glueboards may invalidate your guarantee.

To replace the glueboard...

1. Remove the used *glupac™* glueboard by simply releasing from the metal outer and either retain for catch evaluation or dispose of it hygienically.
2. Remove the protective release paper from the new *glupac™* glueboard.
3. Fold the locating flap into position along the score line.
4. Slowly slide the new *glupac™* glueboard into position with the adhesive side facing the tubes.

Always ensure the selected genuine *glupac™* glueboards are compatible with your unit, available from your PCO or P+L Systems Ltd.

TUBE REPLACEMENT

BEFORE REPLACING THE TUBES, ALWAYS ENSURE THAT THE UNIT IS DISCONNECTED FROM THE MAINS SUPPLY.

To ensure the efficiency of **Flytrap Commercial™** in catching flying insects, the UV tubes should be replaced annually. After twelve months the phosphor coating that emits the correct wavelength of UV light has burnt away and the UV output is diminished substantially.

To replace the UV tubes...

1. Rotate the tube through 90°, freeing it from the tube holders.
2. Pull the tube away from the chassis.
3. Dispose of the used UV tube in conjunction with local WEEE regulations.




STARTER REPLACEMENT

BEFORE REPLACING THE STARTERS, ALWAYS ENSURE THAT THE UNIT IS DISCONNECTED FROM THE MAINS SUPPLY.

The starters provide an extra spark to initially light the UV tube. Starters wear out and should be replaced at the same intervals as the UV tubes.

To replace the starters...

1. Rotate the starter anti-clockwise.
2. Pull the starter free from the unit.

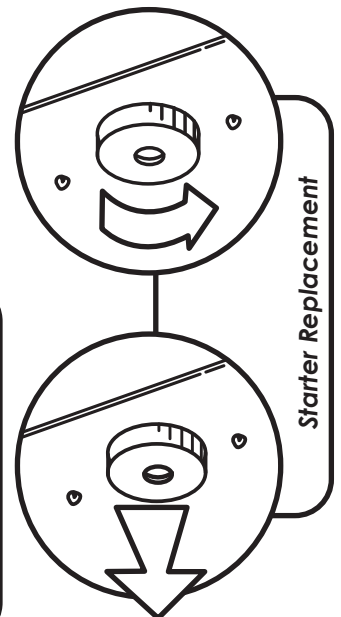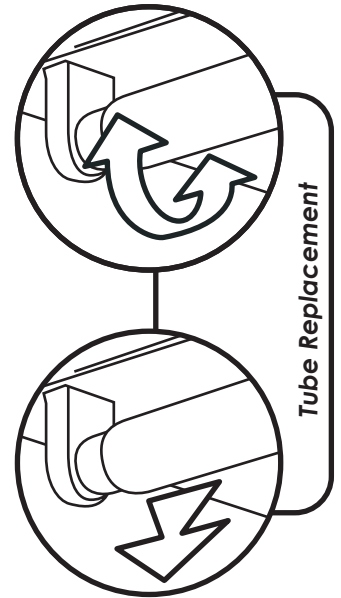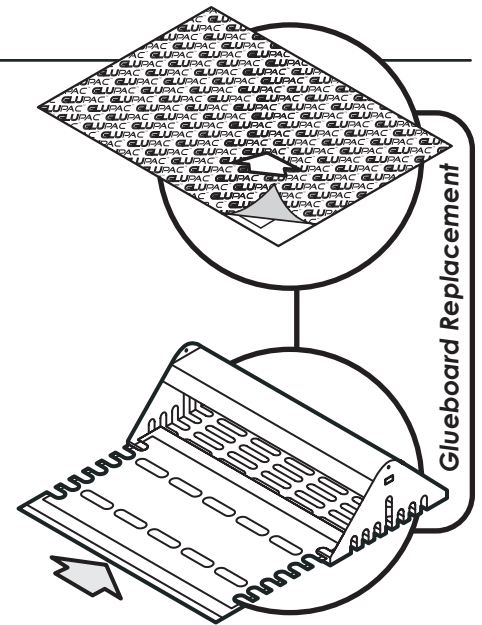

SPECIFICATION / REPLACEMENT PARTS

Unit	FTC30	Unit	FTC40	Unit	FTC80
Voltage	230V ~ 50Hz	Voltage	230V ~ 50Hz	Voltage	230V ~ 50Hz
Dimensions(mm)	470 x 185 x 355	Dimensions(mm)	623 x 185 x 355	Dimensions(mm)	623 x 185 x 355
Coverage	80 Sq. Meters	Coverage	120 Sq. Meters	Coverage	240 Sq. Meters
Weight	4 Kg	Weight	5 Kg	Weight	5 Kg
Light Output	30W	Light Output	40W	Light Output	80W
Tubes	2 x I616	Tubes	2 x I618	Tubes	2 x I662
Starter	2 x I154	Starter	2 x I154	Starter	2 x I154
Glueboards (x6)	INF060	Glueboards (x6)	INF061	Glueboards (x6)	INF061

Flytrap Commercial™ IP65

IP65 Rated Commercial Glueboard Insect Control

Please read these instructions carefully and store in a safe place for future reference.

FLYTRAP COMMERCIAL™ IP65

As part of the P+L brand of insect control products, **Flytrap Commercial™ IP65** is an effective and versatile commercial flykiller which is IP65 rated for use in harsh environments where hosing down is required. **Flytrap Commercial™ IP65** utilises highly effective UV tubes and is designed for use with a high specification glupac™ glueboard. Three sizes of unit are available and **Flytrap Commercial™ IP65** can be ceiling suspended, discreet or slimline wall mounted.

Contents of package

- 1 x Flytrap Commercial™ IP65 flykiller
- 1 x glupac™ pheromone impregnated glueboard
- 4 x Screws and wall plugs
- 2 x Slimline mounting wall brackets
- 2 x Discreet mounting wall brackets
- 2 x Suspension keyrings
- 2 x High powered shatterproof UV tubes (Fitted)

WARNING - THIS APPLIANCE MUST BE EARTHED

INSECT CONTROL PRODUCTS

Flytrap Commercial™ IP65 utilises high powered shatterproof ultra violet tubes to attract flying insects and retains the caught insects on a pheromone impregnated glueboard for inspection or hygienic disposal.

POSITIONING

THIS UNIT IS FOR INDOOR USE ONLY.

Flytrap Commercial™ IP65 should ideally be fixed around two meters above the ground, preferably in the darkest place within the area to be protected and is supplied with a two meter mains lead. Do not position the unit close to windows, skylights or other sources of light, or where it may be obscured by furniture, doors or other obstacles. Ideally, **Flytrap Commercial™ IP65** units should be visible from every part of the area to be protected.

INSTALLATION

PRIOR TO INSTALLATION, ENSURE THE POWER SUPPLY OF YOUR MAINS OUTLET CORRESPONDS TO THAT MARKED ON THE SPECIFICATION LABEL FOUND ON THE FLYKILLER.

Flytrap Commercial™ IP65 can be mounted in three different ways as shown in the mounting options section of this document. Once installed in position, fit the glupac™ glueboard in position as described in the glueboard replacement section of this document. **Flytrap Commercial™ IP65** should be hard wired into an appropriate power supply.

WARNING - THIS APPLIANCE MUST BE EARTHED

USING FLYTRAP COMMERCIAL™ IP65

Flytrap Commercial™ IP65 should ideally be in operation for 24 hours a day, ensuring your premises are kept free of flying insects. Insects are most attracted to **Flytrap Commercial™ IP65** unit at night when there is no competition from daylight or other light sources.

CLEANING

ENSURE THAT THE FLYING INSECT KILLER IS DISCONNECTED FROM THE MAINS BEFORE CLEANING

It is recommended that cleaning is carried out regularly when the glueboard is replaced. Once the glueboard is removed, the unit should be thoroughly wiped down with a damp cloth, removing any build up of dirt. Ensure the unit is completely dry before reconnecting it to the power supply.

GUARANTEE

Flytrap Commercial™ IP65 has a three year guarantee and if maintained as recommended in these instructions should continue to work for many years.* Use of non-approved consumables may invalidate the guarantee. Ensure genuine glupac™ glueboards are used in conjunction with this product.

*Excludes tubes, glueboards and starters. Does not cover breakdown due to misuse, incorrect operation or use in an incorrect application.

MOUNTING FIXING CENTRES

METHOD	FTC30	FTC40	FTC80
Slimline	305mm	458mm	458mm
Discreet	305mm	458mm	458mm
Suspended	506mm	668mm	668mm

Slimline Wall

Discreet Wall

Suspended

(Chain not supplied)

Mounting Options

Flytrap Commercial™ IP65

GLUEBOARD REPLACEMENT

BEFORE REPLACING THE GLUEBOARD, ALWAYS ENSURE THAT THE UNIT IS DISCONNECTED FROM THE MAINS SUPPLY.

The glueboard should be replaced every month with a genuine glupac™ glueboard. Use of non-approved glueboards may invalidate your guarantee.

To replace the glueboard...

1. Remove the used glupac™ glueboard by simply releasing from the metal outer and either retain for catch evaluation or dispose of it hygienically.
2. Remove the protective release paper from the new glupac™ glueboard.
3. Fold the locating flap into position along the score line.
4. Slowly slide the new glupac™ glueboard into position with the adhesive side facing the tubes.

Always ensure the selected genuine glupac™ glueboards are compatible with your unit, available from your PCO or P+L Systems Ltd.

TUBE REPLACEMENT

BEFORE REPLACING THE TUBES, ALWAYS ENSURE THAT THE UNIT IS DISCONNECTED FROM THE MAINS SUPPLY.

To ensure the efficiency of **Flytrap Commercial™ IP65** in catching flying insects, the UV tubes should be replaced annually. After twelve months the phosphor coating that emits the correct wavelength of UV light has burnt away and the UV output is diminished substantially.

To replace the UV tubes...

1. Unscrew the two tube holder end caps providing a waterproof seal.
2. Rotate the tube through 90°, freeing it from the tube holders.
3. Pull the tube away from the chassis.
4. Dispose of the used UV tube in conjunction with local WEEE regulations.






STARTER REPLACEMENT

BEFORE REPLACING THE STARTERS, ALWAYS ENSURE THAT THE UNIT IS DISCONNECTED FROM THE MAINS SUPPLY.

The starters provide an extra spark to initially light the UV tube. Starters wear out and should be replaced at the same intervals as the UV tubes.

To replace the starters...

1. Remove the IP65 rated starter covers by rotating anti-clockwise.
2. Rotate the starter anti-clockwise.
3. Pull the starter free from the unit.

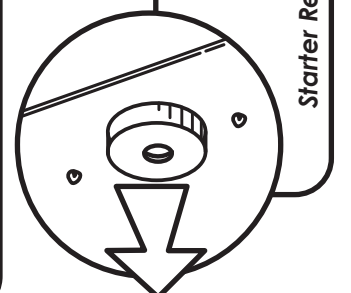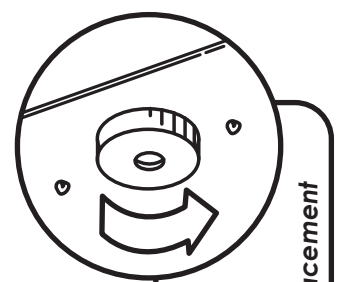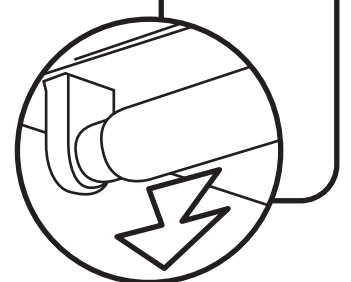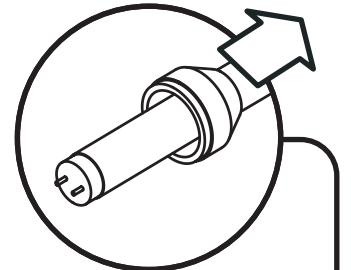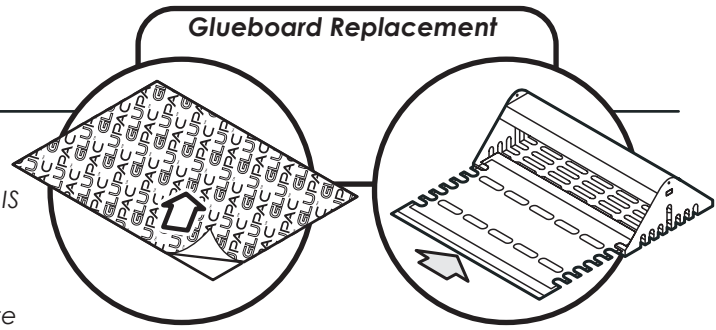

SPECIFICATION / REPLACEMENT PARTS

Unit	FTCIP65 30	Unit	FTCIP65 40	Unit	FTCIP65 80
Voltage	230V ~ 50Hz	Voltage	230V ~ 50Hz	Voltage	230V ~ 50Hz
Dimensions(mm)	500 x 185 x 355	Dimensions(mm)	653 x 185 x 355	Dimensions(mm)	653 x 185 x 355
Coverage	80 Sq. Meters	Coverage	120 Sq. Meters	Coverage	240 Sq. Meters
Weight	4 Kg	Weight	5 Kg	Weight	5 Kg
Light Output	30W	Light Output	40W	Light Output	80W
Tubes	2 x I616SP	Tubes	2 x I618SP	Tubes	2 x I662SP
Starter	2 x I154	Starter	2 x I154	Starter	2 x I154
Glueboards (x6)	INF060	Glueboards (x6)	INF061	Glueboards (x6)	INF061